

# **ICNIRP** Measurement Report

This report presents the results of measurements of electromagnetic field emission levels in the vicinity of mobile base stations. Results are presented as percentages of the power density reference levels for general public exposure in the 1998 edition of the Guidelines published by the International Commission on Non-Ionizing Radiation Protection (ICNIRP)<sup>1</sup>, with figures provided for individual frequency bands used for base station (downlink) transmissions as well as an overall figure for all other frequency bands between 30 MHz to 6 GHz. The total percentage equals the sum of all individual percentages.

The power density reference levels in the ICNIRP Guidelines are the root mean square (rms) values averaged over six minutes. In this report, we have measured the average E-field strength over a six-minute period in each measurement location.

We have applied a measurement threshold of 3dB above the system noise floor<sup>2</sup> of the measurement equipment, below which any E-field strength levels measured are deemed not sufficiently above the system noise floor to be valid. In the results tables below, measurement results are shown to a precision of four decimal places. Results which are not sufficiently above the system noise floor to record as a valid measurement are shown as a dash (-). Results which are too small to register to four decimal places are shown as 0.0000%.

Date of Survey:	14/10/2025	Time Survey completed:	14:09
Survey address:	London EN2		

Measurement equipment		Serial number	Calibration Date	
Meter	Keysight Fieldfox N9915A Spectrum Analyser	MY58311497	28/08/2025	
Probe	Agos Aria-6000 Antenna	ARIA-6000-1023	08/07/2025	
Cabling	1.7m cable	1407	08/07/2025	

<sup>&</sup>lt;sup>1</sup> https://www.icnirp.org/cms/upload/publications/ICNIRPemfgdl.pdf

<sup>&</sup>lt;sup>2</sup> The noise floor of the measurement equipment is the level of background noise that is present before detecting any external signals. In other words, it indicates the absolute minimum level of detectable signals.

### Broadcast bands covered by this report

Frequency Band	Frequency Range	Technology*
	87.5-108 MHz	FM Radio
	174-230 MHz	DAB
	470-694 MHz	Digital TV


## Mobile bands covered by this report

Frequency Band	Frequency Range	Technology*
700 MHz	738-788 MHz	4G, 5G
800 MHz	791-821 MHz	4G
900 MHz	925-960 MHz	2G, 3G, 4G
1400 MHz	1452-1492 MHz	4G (Supplementary downlink)
1800 MHz	1805-1880 MHz	2G, 4G
1900 MHz	1900-1920 MHz	4G
2100 MHz	2110-2170 MHz	3G, 4G
2300 MHz	2350-2390 MHz	4G
2600 MHz TDD	2570-2620 MHz	4G
2600 MHz FDD	2620-2690 MHz	4G
3.4 GHz	3410-3680 MHz	5G, 4G
3.8 GHz	3680-4200 MHz	Various
Others**		

<sup>\*</sup> This is an indication of the type of technologies typically deployed in these bands; not all frequency bands and technologies may be in use at all locations. \*\* All other frequencies between 30 MHz and 6 GHz.

### Survey locations

The survey was conducted within the area shown in the map below. Measurements were taken at five locations and are presented in the following pages of this report.

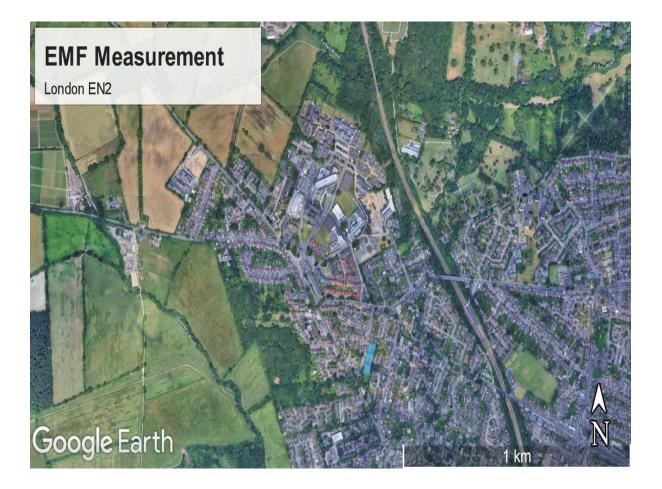

Measurement time:	13:34
Frequency band	Percentage of the ICNIRP reference levels for general public exposure
87.5-108 MHz	0.00844
174-230 MHz	0.00901
470-694 MHz	0.00716
700 MHz	0.00927
800 MHz	0.04170
900 MHz	0.02367
1400 MHz	0.00035
1800 MHz	0.00050
1900 MHz	0.00017
2100 MHz	0.01500
2300 MHz	0.00763
2600 MHz TDD	0.00031
2600 MHz FDD	0.00016
3.4 GHz	0.00174
3.8 GHz	0.00502
Others	0.12241
Total	0.25252

Measurement time:	13:41
Frequency band	Percentage of the ICNIRP reference levels for general public exposure
87.5-108 MHz	0.00788
174-230 MHz	0.00901
470-694 MHz	0.00717
700 MHz	0.00482
800 MHz	0.02802
900 MHz	0.03326
1400 MHz	0.00035
1800 MHz	0.00049
1900 MHz	0.00017
2100 MHz	0.00703
2300 MHz	0.00292
2600 MHz TDD	0.00031
2600 MHz FDD	0.00016
3.4 GHz	0.00171
3.8 GHz	0.00495
Others	0.12147
Total	0.22971

Measurement time:	13:49
Frequency band	Percentage of the ICNIRP reference levels for general public exposure
87.5-108 MHz	0.00787
174-230 MHz	0.00879
470-694 MHz	0.00703
700 MHz	0.00790
800 MHz	0.05329
900 MHz	0.01545
1400 MHz	0.00034
1800 MHz	0.00049
1900 MHz	0.00016
2100 MHz	0.00593
2300 MHz	0.00302
2600 MHz TDD	0.00031
2600 MHz FDD	0.00015
3.4 GHz	0.00170
3.8 GHz	0.00489
Others	0.11953
Total	0.23686

Measurement time:	13:56
Frequency band	Percentage of the ICNIRP reference levels for general public exposure
87.5-108 MHz	0.00758
174-230 MHz	0.00867
470-694 MHz	0.00691
700 MHz	0.00500
800 MHz	0.03234
900 MHz	0.04153
1400 MHz	0.00034
1800 MHz	0.00048
1900 MHz	0.00016
2100 MHz	0.01914
2300 MHz	0.00474
2600 MHz TDD	0.00030
2600 MHz FDD	0.00015
3.4 GHz	0.00166
3.8 GHz	0.00508
Others	0.11783
Total	0.25192

Measurement time:	14:03
Frequency band	Percentage of the ICNIRP reference levels for general public exposure
87.5-108 MHz	0.00846
174-230 MHz	0.00878
470-694 MHz	0.00698
700 MHz	0.00674
800 MHz	0.02924
900 MHz	0.03001
1400 MHz	0.00034
1800 MHz	0.00048
1900 MHz	0.00016
2100 MHz	0.00930
2300 MHz	0.00700
2600 MHz TDD	0.00030
2600 MHz FDD	0.00015
3.4 GHz	0.00166
3.8 GHz	0.00478
Others	0.11813
Total	0.23252

Disclaimer: The results detailed in this report apply only to the tests made at the reported time, using the test equipment detailed. They do not indicate that on another date an identical set of results would be achieved, due to changes in local environmental conditions or other factors which may or may not have an effect on the measurement results obtained at that future time.